


Description

- Spring mechanical dynamometer
- Tensile operation
- DN 100mm analogue dial
- Accuracy: 1% (o.f.s.v.); Safety degree: 3
- Admitted overload: 120%
- Operating temperature: $-30 \div +60$ °C
- Painted aluminium case
- Transparent, made up of polycarbonate
- Ranges from 2 to 200 kg

Versions

- **01-1:** tensile type fitted with upper shackle and revolving lower shackle
- **01-2:** tensile type fitted with upper shackle and revolving lower hook

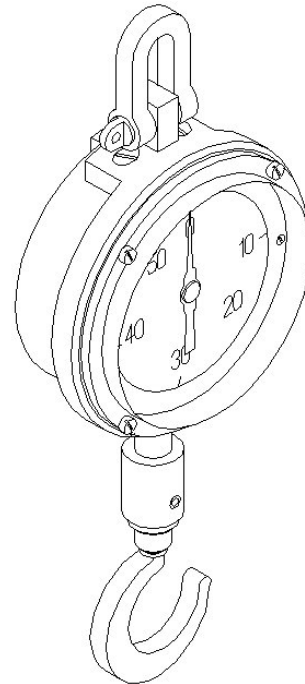

Standard fittings

- SIT Reference calibration report
- EC conformity declaration

Accessories on request

- Maximum index
- Case

CAMI S.r.l.

MEASUREMENT TOOLS PROJECTING AND MANUFACTURING

Via Alessandrini, 2 - 20090 TREZZANO S/N (MI)

Tel. 02 4840 0166 - Fax 02 4840 1905

www.cami-it.com - e-mail camipa@tin.it