

# DIN 105 TSG

## Digital dynamometer with load cell Suitable for cranes

### Features

- Capacities: 500; 1000; 2000 kg
- Display: 5 digit Led height 25 mm
- Supply: rechargeable battery set
- Autonomy: 36 hours
- Main Functions: tare reset, peak  
Settable Auto Off and stand by  
Digital filter  
display brightness
- Materials: case in polycarbonate  
Load cell in galvanized alloy steel
- Fittings: eyebolt top and  
revolving hook lower
- Accuracy: 0.1% f.s.
- Overload: 120% f.s.
- Safety factor: 5
- Working Temperature: -10 ÷ +60 °C
- Protection Degree: IP 55




### DIN 105 TSG RADIO:

Version with wireless weight transmission to remote receiver (see catalogue of remote receiver)

### Standard Equipments

- Remote controller
- Battery charger: 220 V 50/60 Hz
- Calibration certificate
- Declaration CE
- User manual

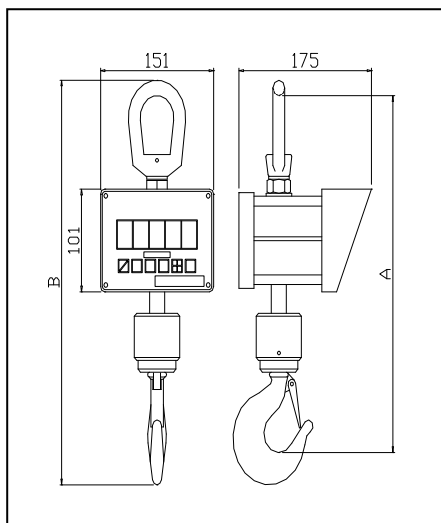

Capacity [kg]	Div. [kg]	Weight [kg]	Dimensions [mm]	
			A	B
500	0.2	5	340	370
1000	0.5	5	360	390
2000	2	5	360	390

## **CAMI S.r.l.**

### **MEASUREMENT INSTRUMENTS**

Via Alessandrini, 2 - 20090 TREZZANO S/N (MI)

Tel. 02 4840 0166 - Fax 02 4840 1905

[www.cami-it.com](http://www.cami-it.com) - e-mail [info@cami-it.com](mailto:info@cami-it.com)