

# DIN TS RADIO

## Digital Radio Dynamometer with load cell compact size execution

### Features

- Capacities (t): 6.3;12; 25;35; 55; 100
- Accuracy: 0.1% f.s.
- Display unit: DIN109 Radio
- Load cells sized for Standard Shackles
- Supply: rechargeable battery set
- Autonomy: 36 hours
- Main functions on the display:
  - Tare reset, peak,
  - Storage of weighing
  - Auto Off function
  - Digital filter, display brightness
- Range of transmission: over 50 meters (free field)
- Load cell material: alloy steel
- Surface protection: galvanization
- Over Load :120% f.s.
- Safety factor: 500% f.s.
- Working range : -10 ÷ +60 °C
- Load Cell protection degree: IP66



**CAMI S.r.l.**


**MEASUREMENT INSTRUMENTS**

Via Alessandrini, 2 - 20090 TREZZANO S/N (MI)

Tel. 02 4840 0166 - Fax 02 4840 1905

[www.cami-it.com](http://www.cami-it.com) - e-mail [info@cami-it.com](mailto:info@cami-it.com)

# ***DIN TSL RADIO*** – Dimensions and weights

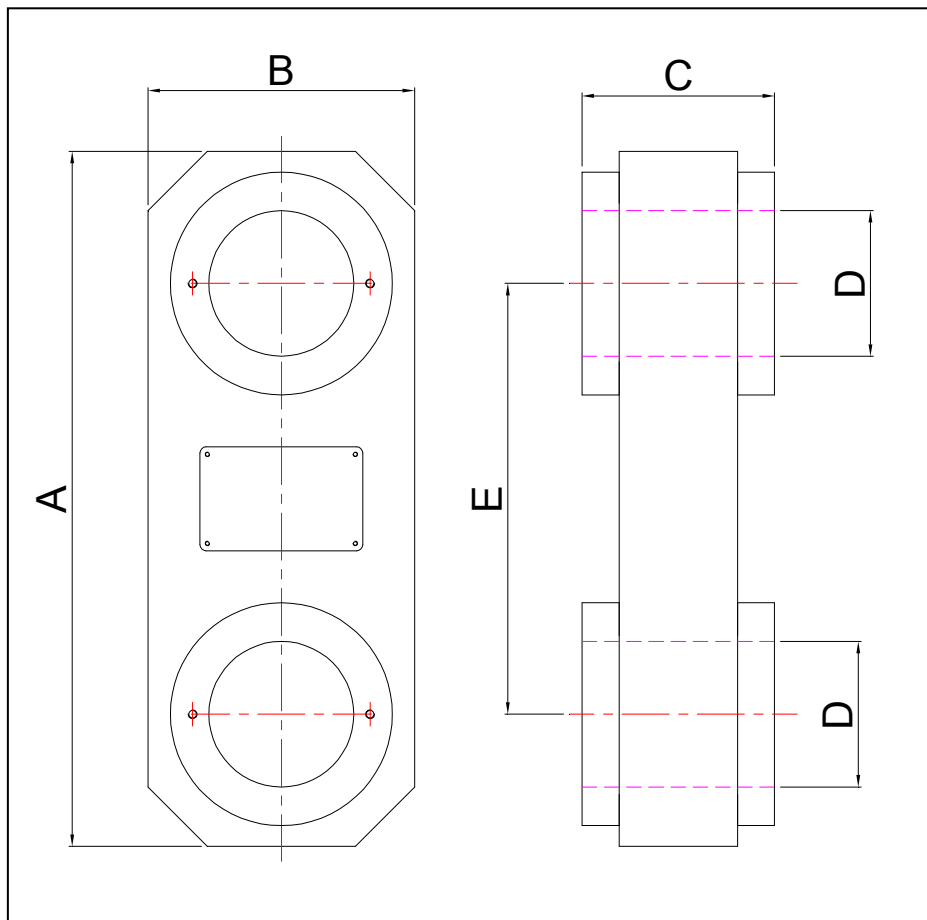

Capacity [kg]	Division [kg]	Weight [kg]	Dimensions [mm]				
			A	B	C	Ø D	E
6300	2	8	270	98	35	27	188
12000	2	8	270	98	49	36	188
25000	5	13	330	124	70	53	200
35000	10	13	330	124	78	60	200
55000	20	16	350	139	94	72	290
100000	50	40	470	180	130	98	290

**CAMI S.r.l.**

**MEASUREMENT INSTRUMENTS**

Via Alessandrini, 2 - 20090 TREZZANO S/N (MI)

Tel. 02 4840 0166 - Fax 02 4840 1905

[www.cami-it.com](http://www.cami-it.com) - e-mail [info@cami-it.com](mailto:info@cami-it.com)